



# **Description:**

The Arched Coping offers a complete finish to any parapet wall. The system utilizes pre-notched lap joints, allowing for fast and secure installation and yielding positive water drainage.

- Fabricated in 10' lengths to fit each arch radius specification; Widths are customized to specification.
- Three piece construction using Pittsburgh seam.
- Fabricated to wall widths 6" to 40".
- 3" minimum face and back leg size.
- · Hemmed drip kick to receive splice cleats.
- Splice cleats spaced 24" on center.

### **Energy Efficiency:**

LEED® and ENERGY STAR® compliant.

### Installation:

- 1. A wood nailer attached to the top of the parapet wall is required.
- 2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
- Install in accordance with EXCEPTIONAL®
  Metals Detail #6056 and Installation #6056.
- Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals Technical Department.


# Warranty:

EXCEPTIONAL Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

#### **Technical Services:**

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.



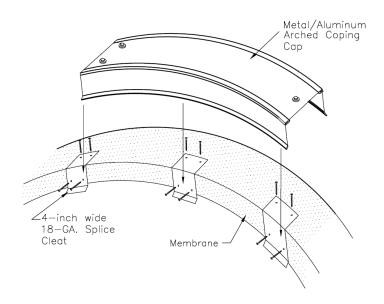

Material	Gauge	Finish
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume <sup>®</sup>	24-gauge	Mill or Kynar <sup>®</sup>