


DURO-LIGHT™ DECK MOUNT SKYLIGHT

DESCRIPTION:


Duro-Light™ skylights offer outstanding lighting and thermal performance in a versatile range of dome or pyramid styles. These skylights offer the highest performance in a fixed unit plastic glazed skylight.

MODELS CA AND CAP:

- Duro-Light skylight unit is fully assembled with corrosion proof screws and high performance weather seals.
- Heavy vinyl extruded curb with co-extruded weather seals, integral condensation gutter and locking system for inner and outer skins of insulated aluminum curb.
- Curb heights available in 9", 12", or 18".
- Aluminum curb and extruded retainer frame components have heliarc welded corners for long-term dependability.
- Glazing is available in thermoformed acrylic or polycarbonate single or double domes.

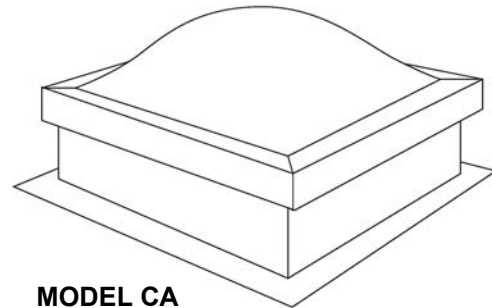

MODEL CA

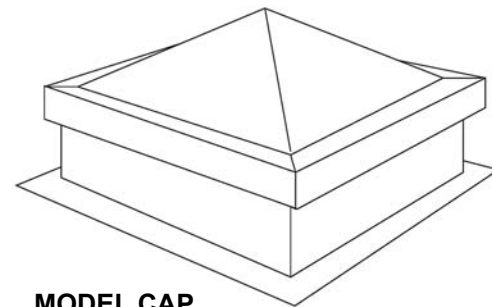

MODEL CAP

UNIT SKYLIGHT OPTIONS

<p>Hurricane Resistant (HR) Glazing</p>	<ul style="list-style-type: none"> • Provided with co-polyester to meet test requirements: ASTM-1886, ASTM-1996, TAS 201, 202 and 203. • Hurricane unit model 5296 or smaller can achieve a 75DP rating. Units larger than model 5276 can achieve a 50DP rating. • Available in clear or white glazing.
<p>Blast Resistant (BR) Glazing</p>	<ul style="list-style-type: none"> • Provided with co-polyester to meet test requirements: ASTM-F1642-04, GSA-TS01-2003. • Available in clear or white glazing.
<p>Pyramid Dome (P)</p>	<ul style="list-style-type: none"> • Available in curb mount and deck mount.
<p>Aerogel</p>	<ul style="list-style-type: none"> • Available in curb mount and deck mount.
<p>Thermalized Sentinel Fall Protection</p>	<ul style="list-style-type: none"> • Tested to compliance with AAMA\WDMA\CSA\101\I.S.2\A440 as required by the International Building Code. • Tested, when new, to 800 ft.-lb. to comply with the intent of OSHA fall protection regulation 29 CFR 1910.23 (e)(8)*, Cal-OSHA Title 8, Chapter 4, Section 3212 (e)(2). • Provided with impact modified acrylic double domes or pyramids depending on size required. • Offered in Clear/Clear, Clear/White or Bronze/Clear color combinations.

STANDARD SIZES AND AVAILABLE OPTIONS

Rough Opening Dimensions	Pyramid Dome	Aerogel	Available Heights
19" x 19"	X	X	9", 12" or 18"
22 ¼" x 22 ¼"	X	X	9", 12" or 18"
30 ¼" x 30 ¼"	X	X	9", 12" or 18"
37" x 37"	X	X	9", 12" or 18"
46 ¼" x 46 ¼"	X	X	9", 12" or 18"
55" x 55"	X	X	9", 12" or 18"
68" x 68"	X	X	9", 12" or 18"
75" x 75"	X	X	9", 12" or 18"
92 ½" x 92 ½"	X	X	9", 12" or 18"
22 ¼" x 30 ¼"	X	X	9", 12" or 18"
22 ¼" x 46 ¼"	X	X	9", 12" or 18"
30 ¼" x 46 ¼"	X	X	9", 12" or 18"
30 ¼" x 69 ½"	X	X	9", 12" or 18"
37" x 75"	X	X	9", 12" or 18"
46 ¼" x 69 ½"	X	X	9", 12" or 18"
46 ¼" x 89 ½"	X	X	9", 12" or 18"
57 ½" x 69 ½"	X	X	9", 12" or 18"
57 ½" x 89 ½"	X	X	9", 12" or 18"

SAFETY CONSIDERATIONS

- Although the skylights are designed to protect against accidental falls, they should never be walked upon under any circumstances. The owner or contractor should restrict access only to authorized personnel who have been adequately cautioned as to the location of the skylights.
- The use of skylight guards is strongly recommended.