

CADDY[®] PYRAMID ST Strut-Based Supports

DESCRIPTION:

CADDY[®] PYRAMID ST Strut-Based Supports offer an ideal solution for mounting electrical and mechanical applications to strut. Superior load distribution and a low abrasion foam interface combine to ensure that the roof membrane is protected despite varying roof surfaces and shifting caused by expansion and contraction.

- Two sizes available:
 - 6-Inch:
 - 4.80-inch height.
 - 10-Inch:
 - 4.80-inch height.

Contact Duro-Last Sales for more size options.

- No slip sheet required between support and Duro-Last[®] membranes.
- Ready to use out of the box, saving installation time and labor.
- Hot-dip galvanized and UV stabilized for long lasting performance.
- Supports green building requirements; thermoplastic bases are made from recycled material and can contribute to earning LEED credits.


ORDERING:

Supports are ordered per box.

- 6-Inch – 20 per box.
- 10-Inch – 10 per box.

PRECAUTIONS:

1. Read Safety Data Sheets (SDS) prior to using.
2. Wear proper personal protective equipment, such as gloves and eye protection, per the SDS.

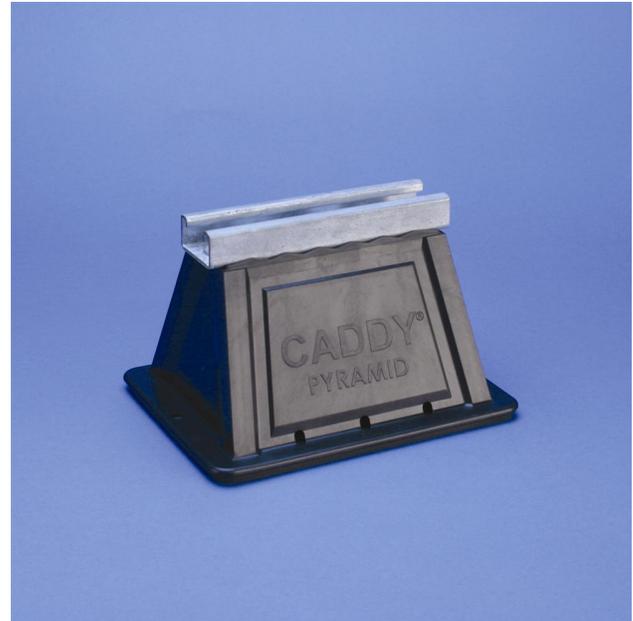

6-Inch shown

INSTALLATION:

1. Set support on deck directly beneath pipes, conduits, ducts, cable trays and other equipment.
2. Use third-party hardware, when required by equipment suppliers, to secure equipment to struts.

TABLE 1. PHYSICAL PROPERTIES		
	6-Inch	10-Inch
Height	4.80"	4.80"
Weight	1.0 lbs.	2.0 lbs.
Ultimate Static Load	300 lbs.	1,000 lbs.